


PLAN VIEW

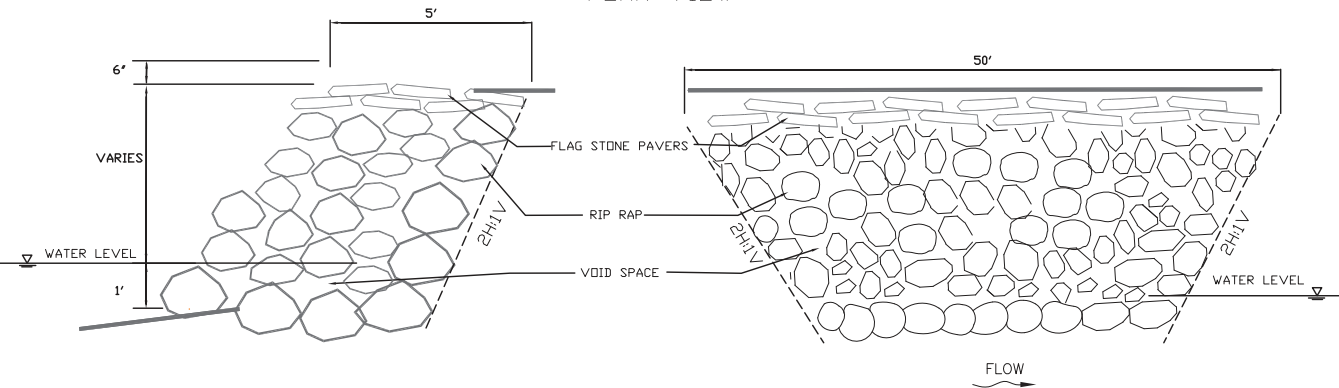

SECTION A A'

SECTION B B'

1. FLAGSTONE PAVER SIZE SHALL BE 24 INCH TO 48 INCH, AND ABOUT 2 INCHES THICK. FLAGSTONE PAVERS LAYER SHALL COVER ENTIRE HIBERNACULA. LOWER LAYER SHALL BE INTERSPERSED WITH RIPRAP AND SHALL COVER 50 PERCENT OF HIBERNACULA AREA. BROKEN CONCRETE SLABS UP TO 8 INCHES THICK CAN BE USED INSTEAD OF FLAGSTONE PAVERS.

2. RIPRAP SHALL BE LIGHT CLASS ROCK FOR SLOPE PROTECTION PER STATE STANDARD SPECIFICATIONS 72-5.02. HOWEVER, RIPRAP (WITH FLAGSTONE PAVERS) SHALL BE LOOSELY PACKED TO PROVIDE ABOUT 50 PERCENT VOID SPACE.

1 ARTIFICIAL HIBERNACULA
L-9 Not To Scale