



Station 5 – Phase 4a Project Alternatives

Action Alternatives	No-Action Alternatives
Proposed Action	No Project Construction
Strengthen-Levee-in-Place	Potential Levee Failure

Proposed Action

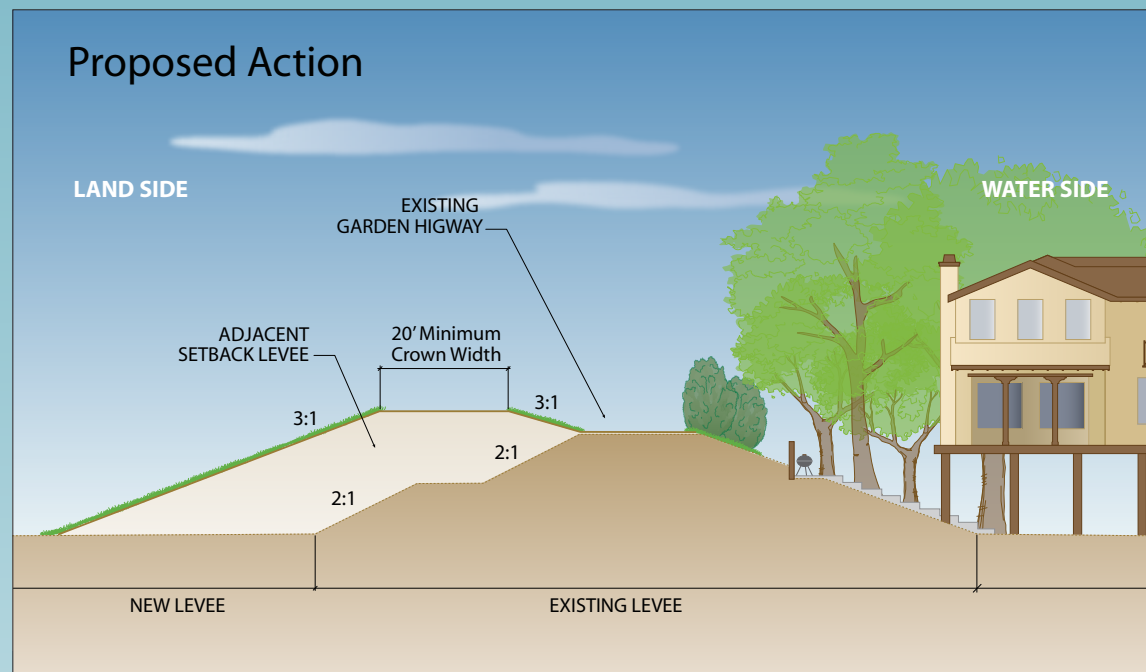

Strengthen-Levee-in-Place Alternative

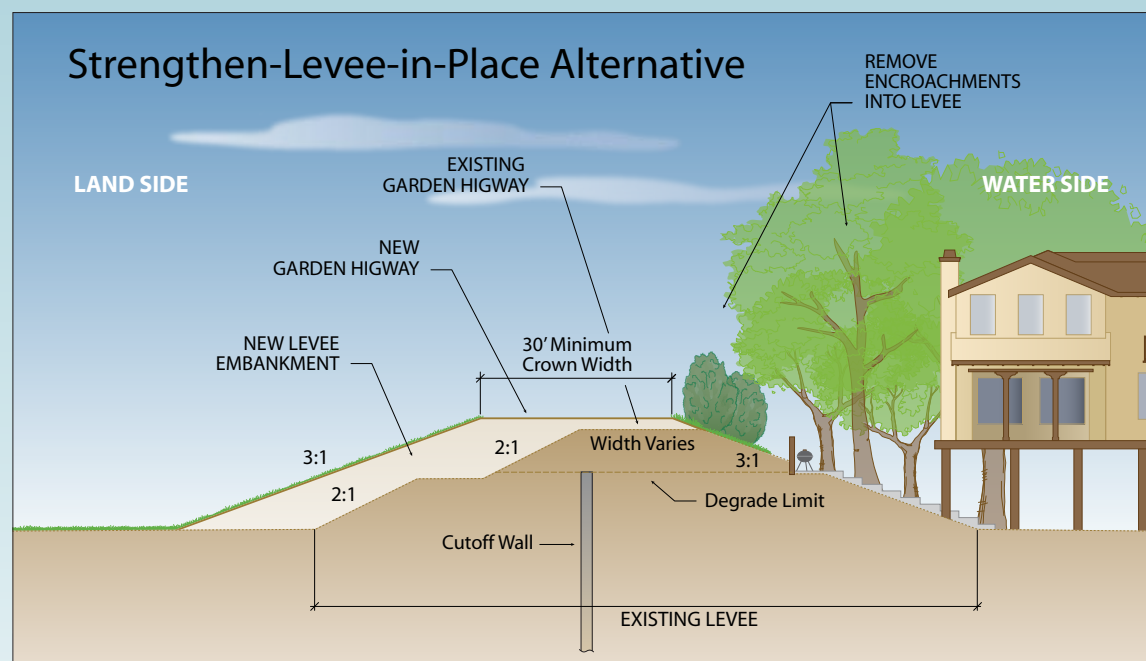

Comparison of Major Project Components of the Action Alternatives

	Proposed Action	Strengthen-Levee-in-Place Alternative
General Remediation	Construct an Adjacent Levee	Raise existing levee from Reach 10-11B Widen existing levee from Reach 12-15
Riverbank Erosion Control	None	Placement of riprap in 5 locations, totaling 5,410 feet of riverbank
Waterside Vegetation Removal	1 acre	Removal of up to 21 acres of waterside vegetation from Reaches 10 to 15 to comply with USACE encroachment guidance
Garden Highway Closure	Portions of the Garden Highway south of Powerline Road may experience single-lane closures for 8 to 12 weeks	Closure of 1.5- to 2-mile segments of Garden Highway, both lanes (all reaches), for approximately 8 to 12 weeks per segment